


Letter	0	Dim.nach Appreso ZNR.04-00/30a	09.05.1996	Zechner	Name

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

Number	
Modification	
Date	
Name	

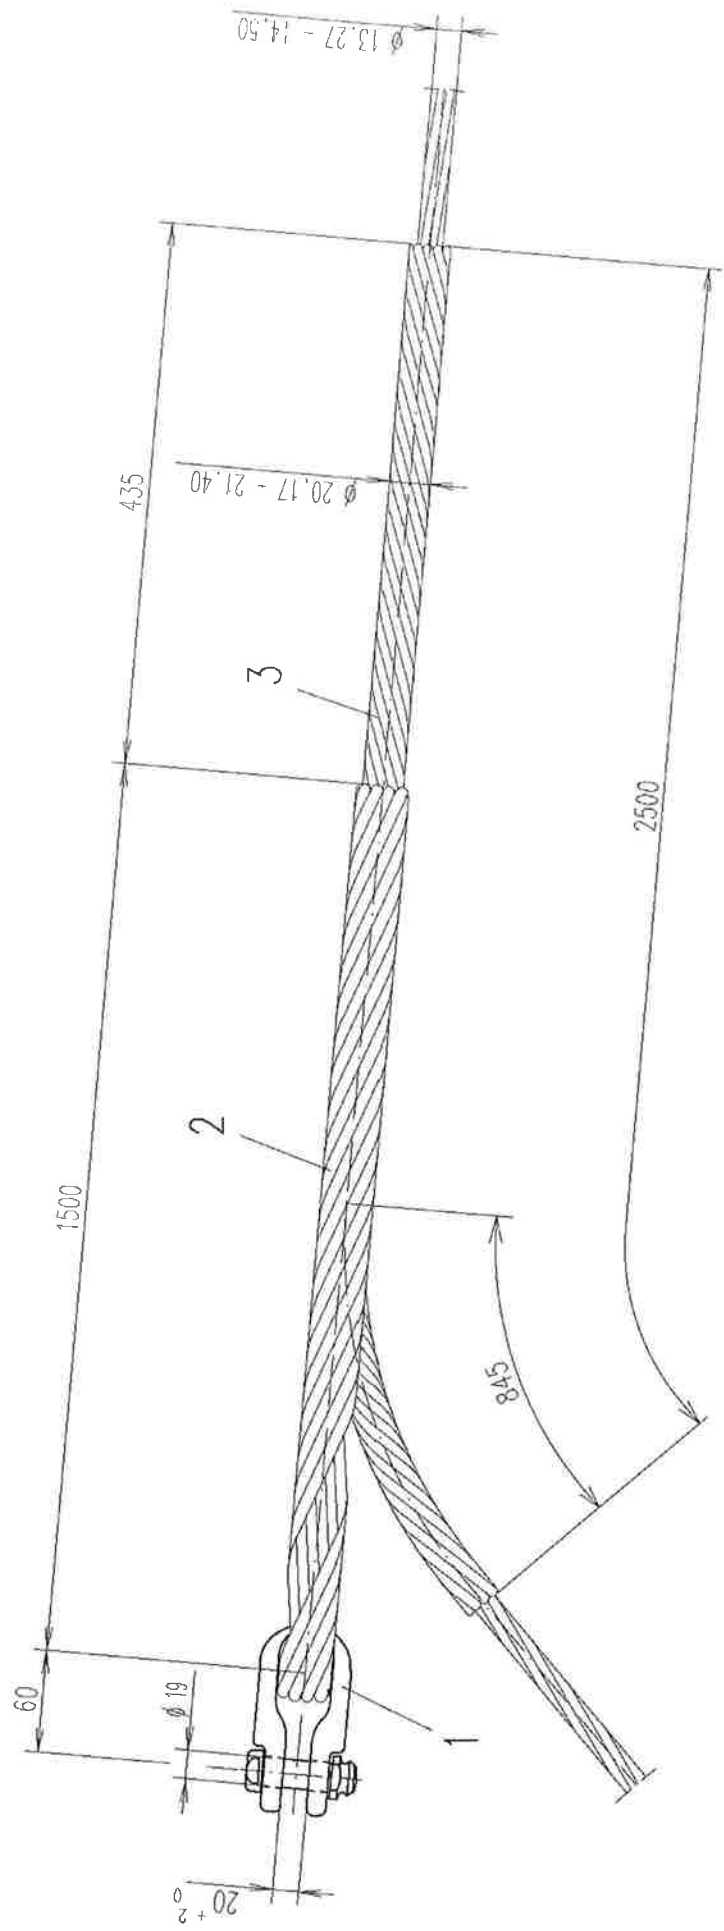

holding strength: min. 95% of UTS of OPGW

Tolerance acc. to: --- Short circuit current: 40 kA 1s Breaking load: --- kN Mass: approx. 4.8 kg

3	1	reinf. rod $\phi 13,27-14,50$; 13x $\phi 3,45/2500$	4780,04		
2	1	dead end $\phi 20,17-21,40$; 6x $\phi 4,65/1500$	4781,09		
1	1	simple clevis	F1803001 A3	4410,15/1	
		Dim Qty	Description	Standard	Drg. no.
					Art. no.
					Material
					Surface
					Mass [kg]
					Replace for
					Sim. to drg.-no.
					F1806022
					Replaced by
					Art. No.
					4480,04
					Rev. Mod.
					a
					Drg. No.
					F1806023
					No. of pages:
					Page
					A3



Dead end set for OPGW

$\phi 13,27-14,50$ with al-or al-alloy layer