Tolerance acc. to: ISO 2768 v	Short circuit current: --- kA 1s	Breaking load: --- kN	Mass: approx. 0,65 kg

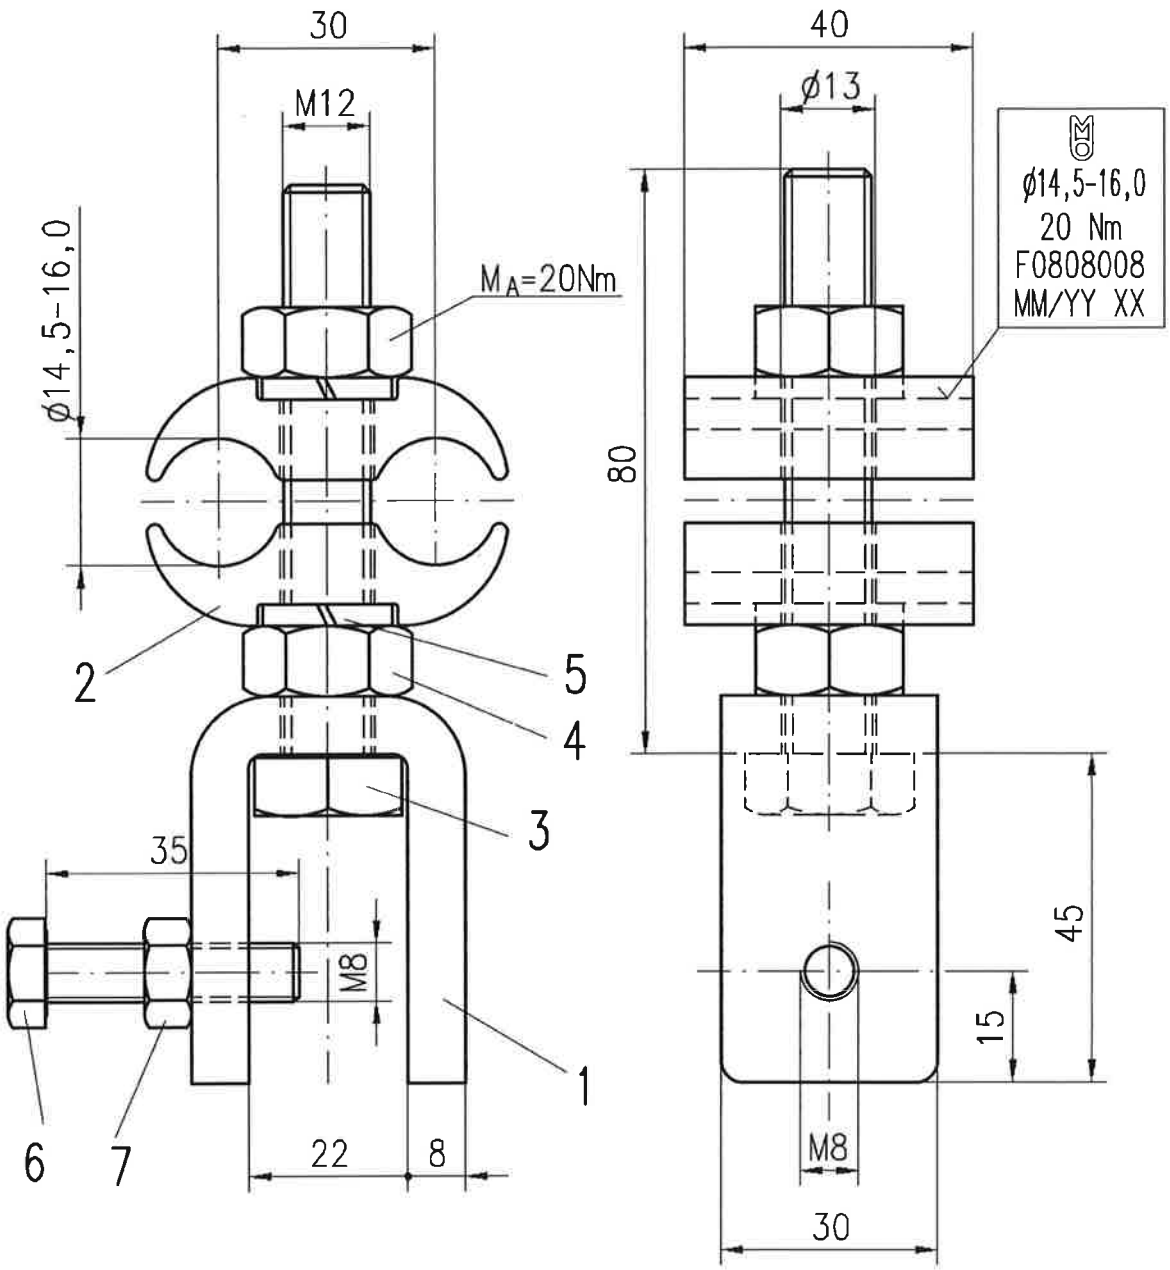

Itm	Qty	Description	Standard	Drg. no.	Art. no.	Material	Surface	Mass [kg]
7	1	hexagon nut M8	DIN 934		1052.02/3	8	hot dip galv.	
6	1	hexagon screw M8x35	DIN 933		1009.05/1	8.8	Dacromet co.	
5	2	spring washer 12	DIN 7980		1064.14	St	mech.galv.	
4	2	hexagon nut M12	DIN 934		1052.04/2	8	hot dip galv.	
3	1	hexagon schrew M12x80	DIN 933		1010.93/2	8.8	hot dip galv.	
2	2	clamping case		21.169 A3	Z0 002.082	EN-AW 6082 T6		
1	1	strap 30x8		D0805003 A4	ZB 002.046	S235JR	hot dip galv.	

Letter	Revision	Date	Name
c	Skt.-Schraube M8 dacrometiert	28.12.2004	Übelleitner
b	Bereich geändert	21.12.1999	Kleinhappl
a	20 Nm nachgetragen	20.06.1996	Grimm

	Name	Date	Modification	Number
	Wild M.	04.03.2010	Supplier code added	d

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

1994	Date	Name
Drawn	07.03.	Grimm
Checked	-11-	Ze

MOSDORFER AUSTRIA

Replace for	Sim. to drg.-no.
Replaced by	F0808010
Art. No. 4680.27/1	

Title: Fastening clamp
for cond. Ø14,5 - 16,0 mm

Scale 1:1

Drg. No. F0808008

Rev. d | Mod. | A4

No. of pages | Page