


Letter	0	Drwg. revised
Revision		
Date	26.01.2007	Übelletter
Name		

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

Number	
Modification	
Date	
Name	

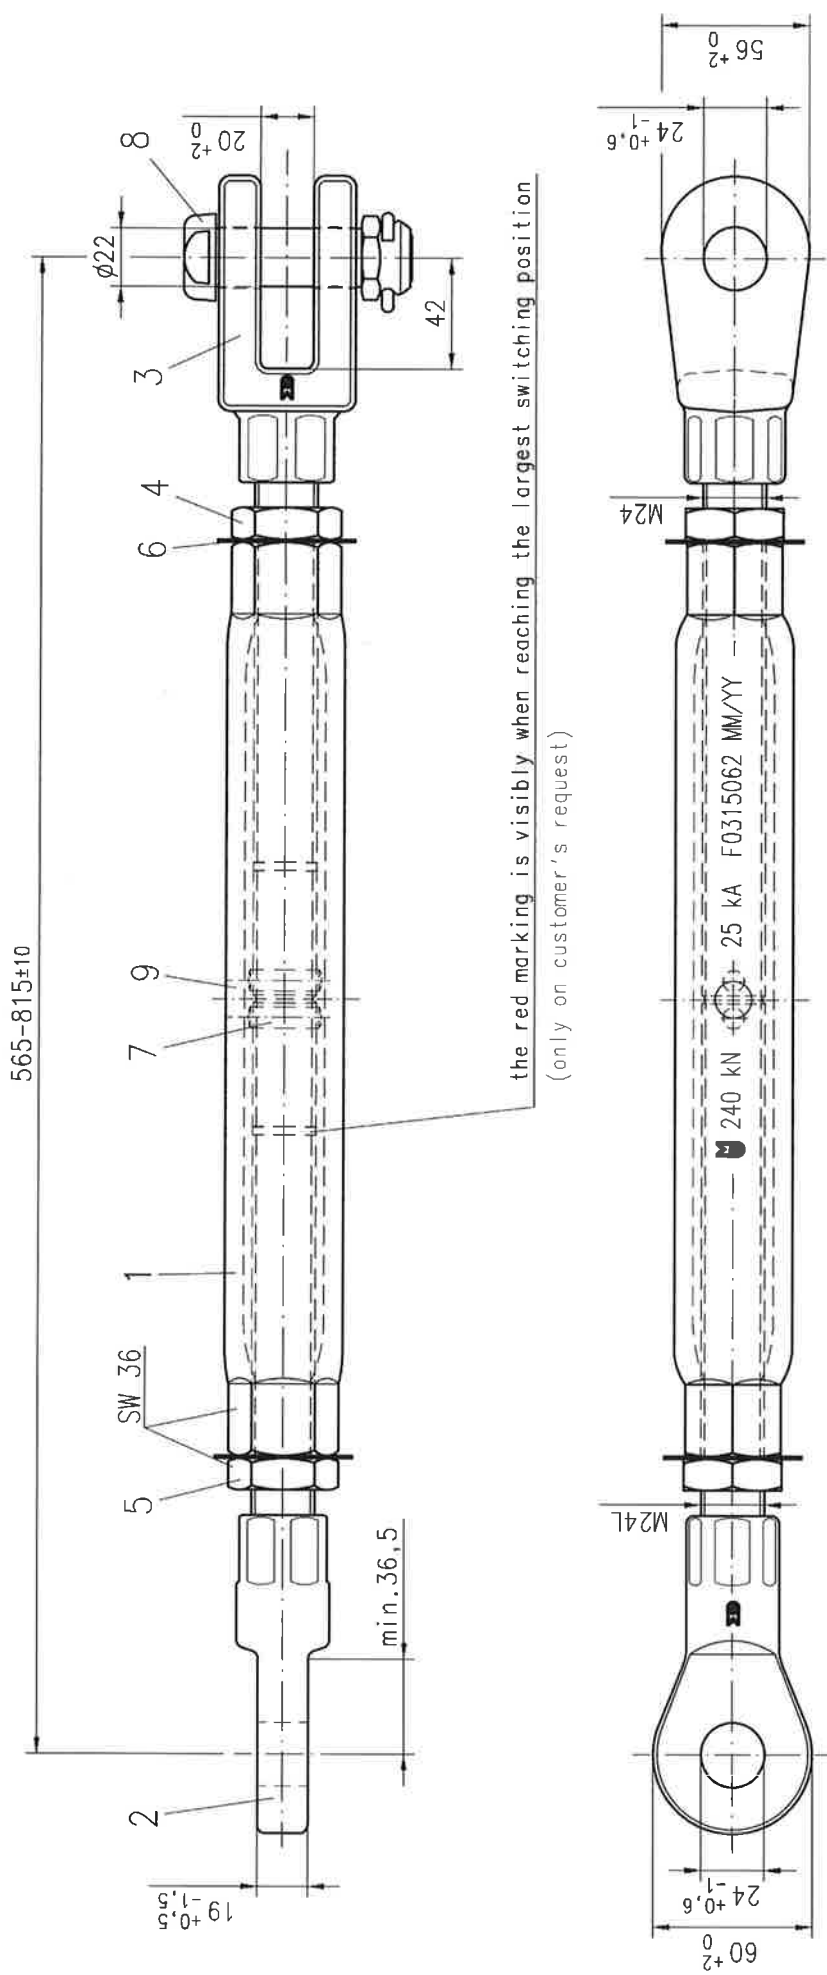

9	1	Plug Ø14x7		D0315007	ZV 100,100	Al		
8	1	Bolt S22x54	DIN 48073		1046,32/0	8.8	hot dip galv.	
7	2	Parallel pin Ø8x26	DIN 7		1050,41	St	mech. galv.	
6	2	Washer with top f. M24		D0315008	1067,03/1	St	stainless	
5	1	Hexagon nut B M24L	DIN 439		1052,40/1	8	hot dip galv.	
4	1	Hexagon nut B M24	DIN 439		1052,30/1	8	hot dip galv.	
3	1	Clevis bolt M24x280		D0315086	ZC 005,161	C 45 E + 0T	hot dip galv.	
2	1	Eye bolt M24x285		D0315085	ZO 001,109L	C 45 E + 0T	hot dip galv.	
1	1	Turnb. -nut M24x345	DIN 2448	D0315032	ZS 095,065	S355JH	hot dip galv.	
Item Qty		Description	Standard	Drq. no.	Art. no.	Material	Surface	Mass [kg]
2001		Date	Name	Replace for 18.564, F0315050 Sim. to drg.-no.				
Drawn		05.09.	Zechner	Replaced by F0315057 A3				
Checked		05.09.	Ze	Art. No. 4268,11/1				
		Title	Drq. No. F0315062					
		Scale	Rev. Mod. a A3					
		1:2	No. of pages					



Turnbuckle M24
eye-clevis, 565-815 mm

Tolerance acc. to: ISO 2768 v Short circuit current: 25 kA 1s Breaking load: 240 kN Mass: approx. 5,2 kg