Tolerance acc. to: ISO 2768 v	Short circuit current: --- kA 1s	Breaking load: --- kN	Mass: approx. 0.7 kg

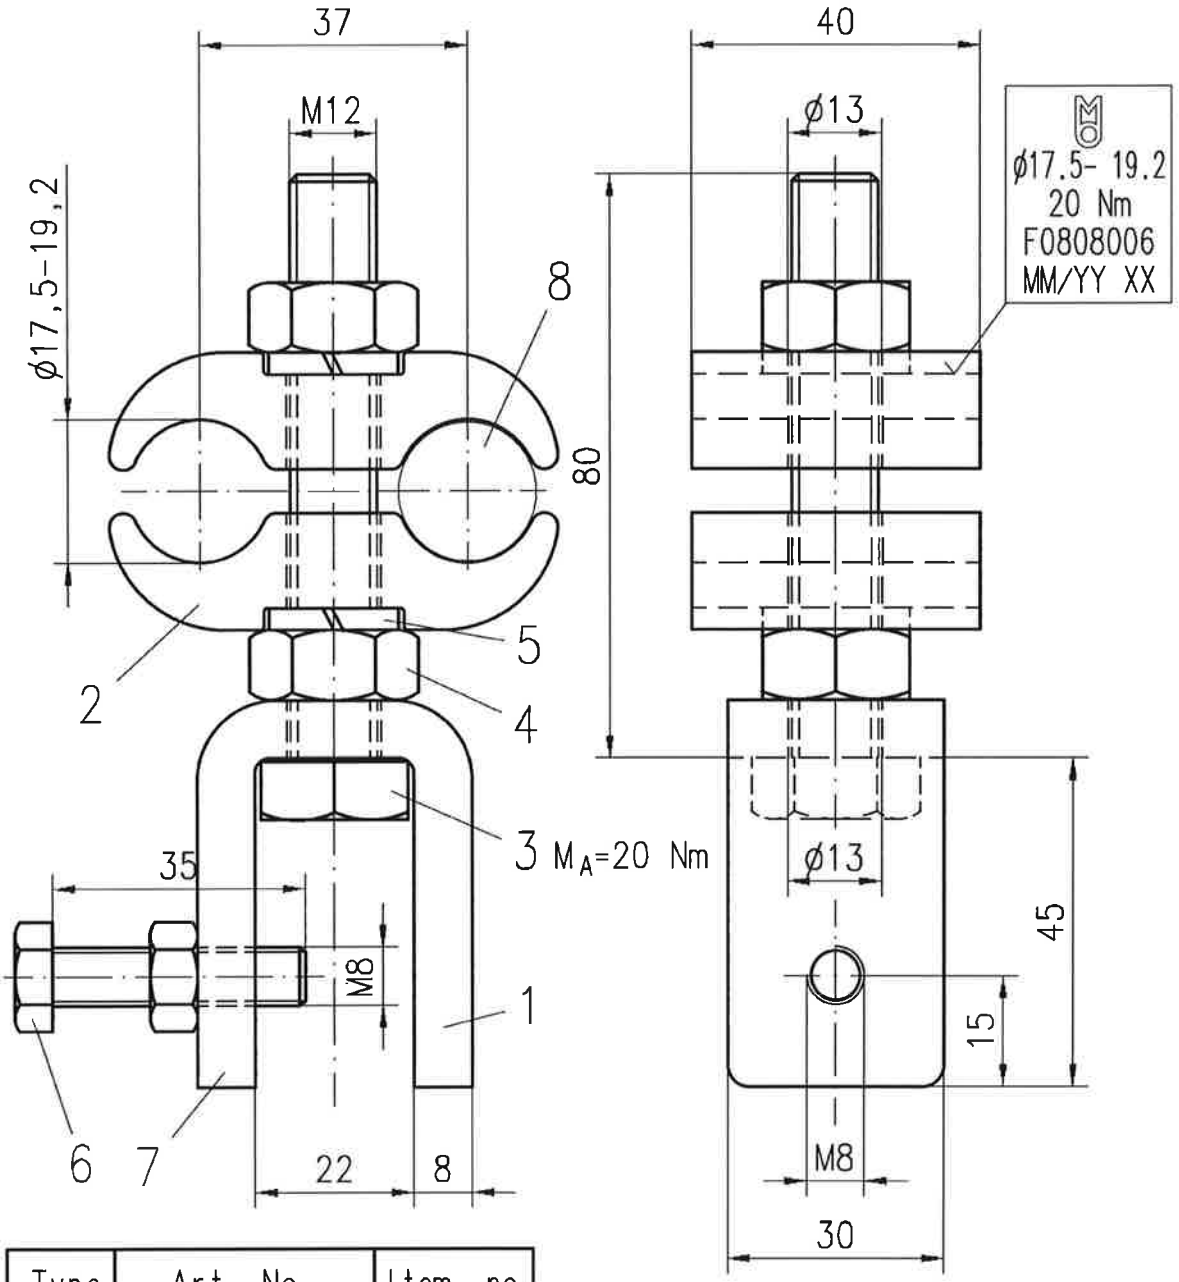

Type	Art. No.	Item.-no.
1	4680.27/2	1 - 7
2	4680.27/2F	1 - 8

Itm	Qty	Description	Standard	Drg. no.	Art. no.	Material	Surface	Mass [kg]
8	1	Filler piece ø19x40				Al		
7	1	Hexagon nut M8	DIN 934		1052.02/3	8	hot dip galv.	
6	1	Hexagon screw M8x35	DIN 933		1009.05/1	8.8	Dacromet co.	
5	2	Spring washer 12	DIN 7980		1064.14	St	mech. galv.	
4	2	Hexagon nut M12	DIN 934		1052.04/2	8	hot dip galv.	
3	1	Hexagon screw M12x80	DIN 933		1010.93/2	8.8	hot dip galv.	
2	2	Clamping case		Profil22.040	MP215.077	EN-AW 6082 T6		
1	1	Strap 30x8		D0805003	ZB 002.046	S235JR	hot dip galv.	

Letter	Revision	Date	Name
c	Skt.-Schraube M8 dacrometiert	28.12.2004	Übelleitner
b	20 Nm nachgetragen	20.06.1996	Grimm
a	Bereich ø 17.5 - 19.2 (15.8 - 19.2)	07.06.1994	Grimm

Number	Modification	Date	Name
e	Supplier code added	01.02.2010	Wild M.
d	Type 2 added	15.03.2006	Übelleitner

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

	Date	Name
1993		
Drawn	08.08.	Zechner
Checked	-11-	Ze

MOSDORFER AUSTRIA

Replace for	Sim. to drg.-no.
Replaced by	
Art. No. s.Tab.	

Scale 1:1

Title

Fastening clamp
for cond. ø17.5 - 19.2 mm

Drg. No. F0808006

Rev. e | Mod. | A4

No. of pages | Page