


Letter	b	Indexpassung	Revision	17.10.2014	Höfler	Name
<p>This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written consent of Mosdorfer company.</p>						
Number		Modification	Date	Name		

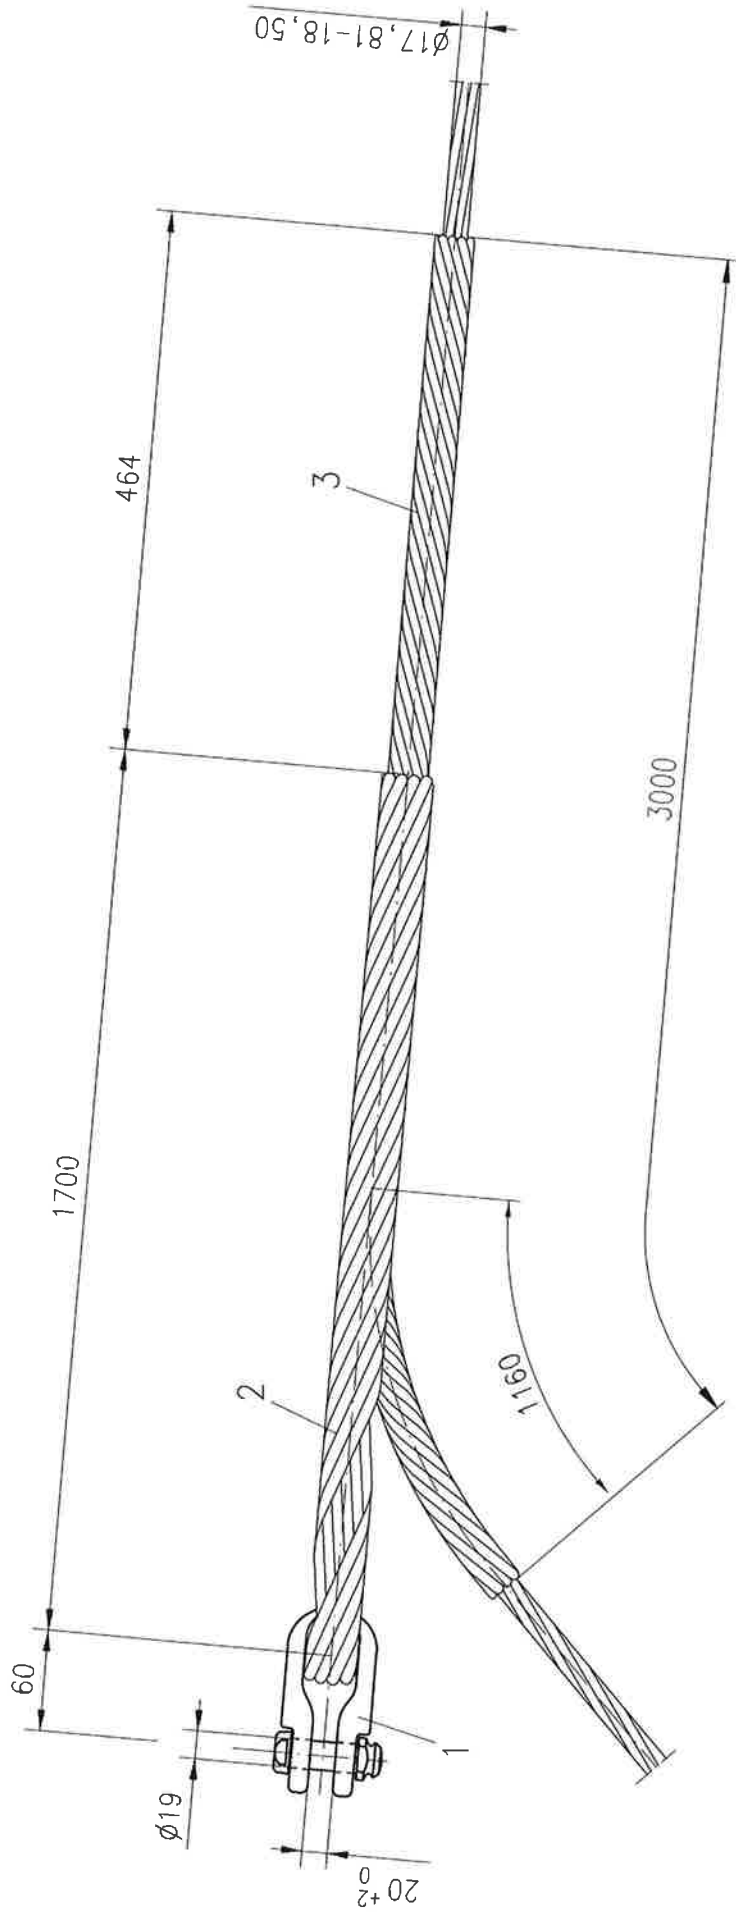

Minimum failing load = 95 % of UTS of conductor.

3	1	Reinf. rod	Al-alloy					
2	1	Dead end	ACS					
1	1	Timble clevis	Steel	hot dip galv.				
Item Qty		Description	Standard	Drq. no.	Art. no.	Material	Surface	Mass [kg]
2012		Date	Name		Replace for			
Drawn		27.07.	Hierzenhofer		Replaced by			
Checked		27.07.	Hierzenhofer		Art. No.			
		Title		Type		Drq. No.		Rev. Mod.
		Scale		K		F1806034		b
		---		Dead end set for OPGW		4480.09		A3
				ø17,81-18,50 mm with al- or al-alloy layer		No. of pages		Page

Tolerance acc. to: --- Short circuit current: 40 kA 1s Breaking load: --- kN Mass: approx. 6,2 kg