


|                     |  |          |  |        |  |
|---------------------|--|----------|--|--------|--|
| Supplier Code added |  | Revision |  | Letter |  |
| 21.12.2010          |  | Gruber   |  |        |  |
|                     |  |          |  |        |  |
|                     |  |          |  |        |  |
|                     |  |          |  |        |  |

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company

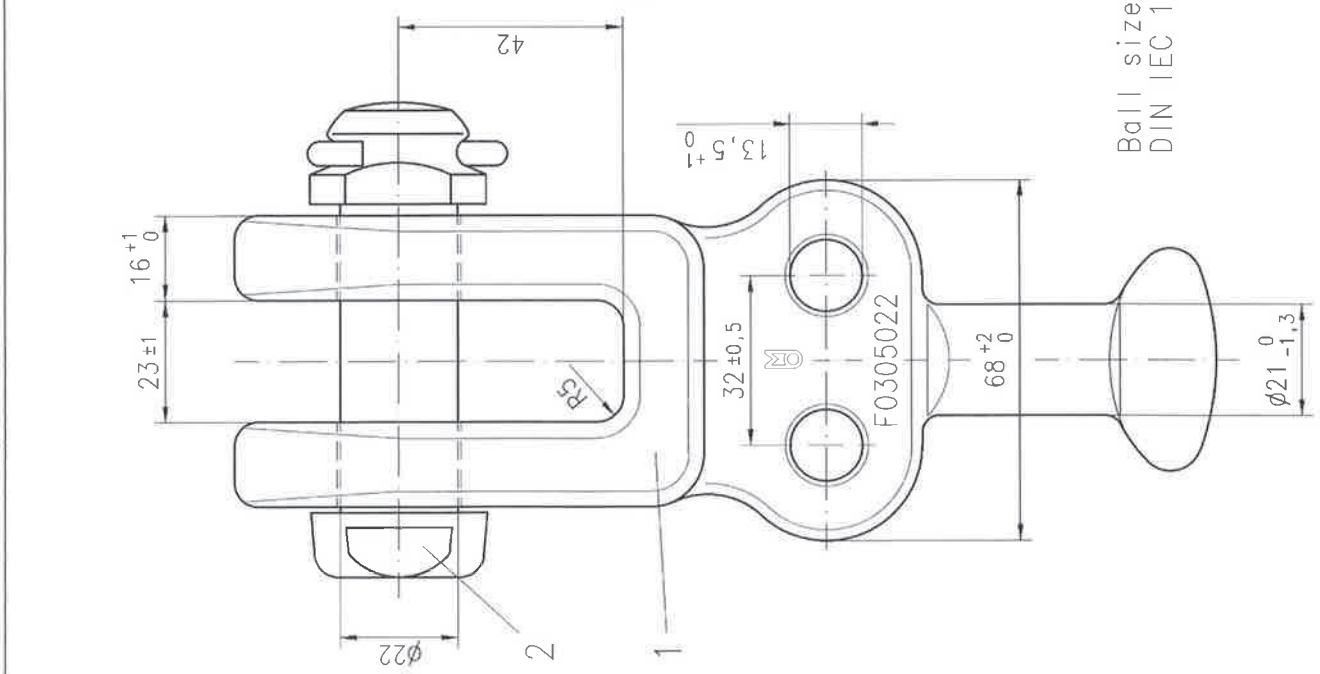

230 kN 50 kA  
MM/YY XX

|          |   |                    |           |                  |          |               |         |
|----------|---|--------------------|-----------|------------------|----------|---------------|---------|
| 2        | 1 | bolt S22x57        | DIN 48073 | 1046.31/0        | 8.8      | hot dip galv. |         |
| 1        | 1 | ball clevis IEC 20 | IEC 120   |                  | C45E+QT  | hot dip galv. |         |
| Item Qty |   | Description        | Standard  | Drq. no.         | Art. no. | Material      | Surface |
| 2003     |   | Date               | Name      | Replace for      |          |               |         |
| Draw     |   | 10.07.             | Gruber    | Replaced by      |          |               |         |
| Checked  |   | -11-               | De        | Art. No.         |          |               |         |
|          |   |                    |           | 4217.33/1        |          |               |         |
|          |   |                    |           | Sim. to drg.-no. |          |               |         |
|          |   |                    |           | F0305021 A3      |          |               |         |
|          |   |                    |           | Drg. No.         |          |               |         |
|          |   |                    |           | F0305022         |          |               |         |
|          |   |                    |           | Rev.             |          |               |         |
|          |   |                    |           | a                |          |               |         |
|          |   |                    |           | Mod.             |          |               |         |
|          |   |                    |           | A3               |          |               |         |
|          |   |                    |           | No. of pages     |          |               |         |
|          |   |                    |           | Page             |          |               |         |

Ball clevis twisted  
IEC 20, S22, t.c.p.f.

Scale  
1:1

Tolerance acc. to: DIN 7526 F Short circuit current: 50 kA 1s Breaking load: 230 kN Mass: approx. 1,6 kg