



Letter	Revision	Date	Name

This page and its redactions is intellectual property of Mosdorfer Company and it isn't allowed to reword them information is a trade secret without the written consent of Mosdorfer company.

Number	Modification	Date	Name

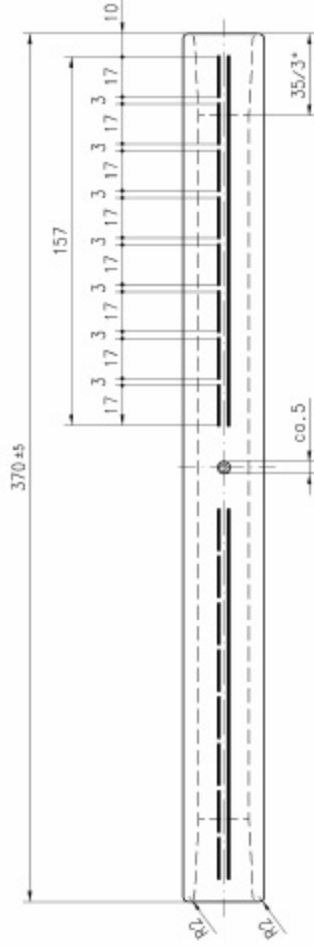

Dimension after compr.

Minimum failing load = 95% of UTS of conductor.
 The compound for the Al-sleeve is added in tubes.1 tube (250g) for 7 sleeves.

Sheet: 34.521.5270	Standard: Drg. no.	Art. no.	AMS(0,5)22	Surface	Mass (kg)
Title: Description	Replace for	Material		Sim. to org. no.	
2005 Date	Replaced by			F1103069 A3	
Drawn: 12.04.2005	Art. No.			4853 41/1	
Checked: -/-	Drg. No.				
	F1103069				
	Rev. Mat.				
	A3				
Title: Compression joint for AAC □ 241 (Ø20,1 mm)			No. of pages		
Scale: 1:1,5			Page		
Tolerance acc. to: ISO 2768 c			Short circuit carrier: --- M Mass: approx. 0,5 kg		
			Breaking load: --- M		