

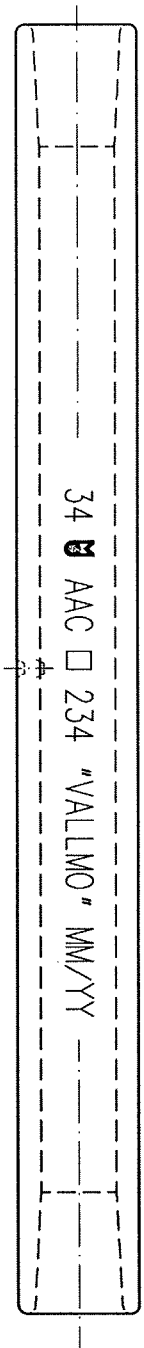



This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

Number	Modification	Date	Name

Letter	Revision	Date	Name

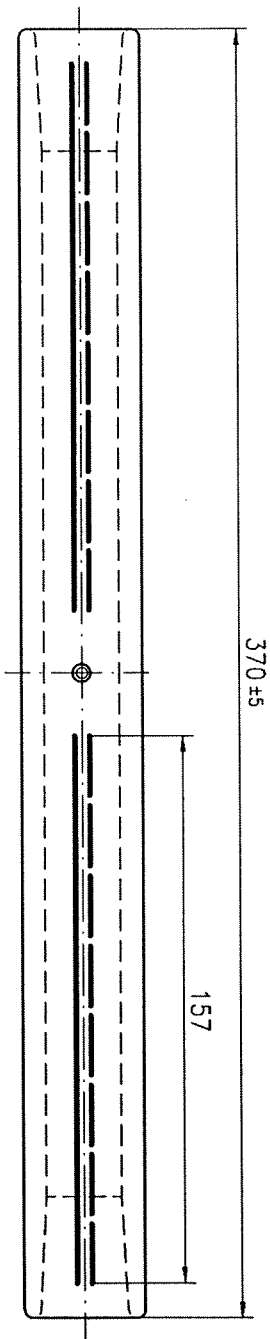

Dimension after compr.

Minimum failing load = 95% of UTS of conductor.
 The compound for the Al-sleeve is added in tubes. 1 tube (250g) for 7 sleeves.

Tolerance acc. to: ISO 2768 c Short circuit current: --- kA 1s Breaking load: --- kN Mass: approx. 0,5 kg

Scale	1:1,5	Title	Compression joint for AAC □ 234 "VALLMO" (φ20,1 mm)
Int'l Qty	2007	Description	Sleeve φ34,5/φ21,5/370
Date	14.08.	Name	WILD M.
Checked	-II-	Checked	-II-
Standard	Drq. no.	Art. no.	Material
MOSDORFER			
AUSTRIA			
Replaces for	Art. No.	Surf. face	Mass [kg]
	4852.0007		
Replaced by	Art. No.	Sim. to drg.-no.	
		F1103069 A3	
Drq. No.	F1104004	Rev. Mod.	A3
No. of pages		Page	