


## frogDim1-0

Multifunktionell 1-kanals dimställon för att dimma, tända och släcka belysning (110-240 V ~). Bryt- och dimningsfunktion för all godkänd bakkantsfasstyrd dimrningsbelysning. Framkantsfasstyrning endast godkänd för induktiv last. Med integrerad logikmodul med komfort- och timerfunktioner, effektmätning och kortslutningsdetektering. (1x 300 W @ 230 V~)

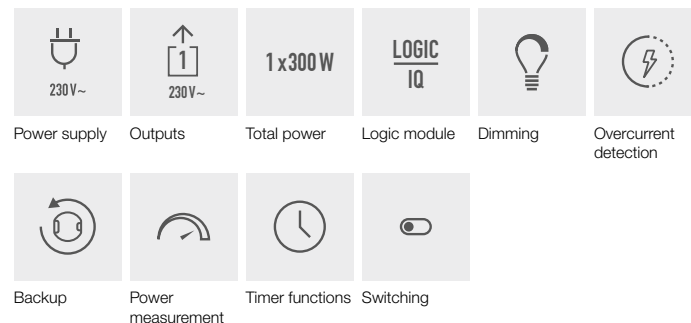

### Technical Data

#### Category

Article designation	frogDim1-0
Article number	D1-0-300.01
Assembly type	Recess-mounted (in device socket according to DIN 49073)


#### Functions and power

Inputs	0
Outputs	1 (AC 110–240 V ~)
Outputs dimmable	Yes (phase cutting or phase section control can be switched using the frogblue app; phase cutting is only permitted for inductive loads)
Minimum Load LED	3 W
Maximum Power per output	300W/300VA (220-240V~) 150W/150VA (110-219V~)
Suitable loads	Light bulb load, electronic transformer, inductive load, (no motor load)
Output modes	dimming, switching
Protection category	Conforms to IP20
Integrated logic module	Yes
Integrated configuration backup	Yes
Comfort and timer functions	Yes
Power measurement	Yes
Short circuit detection and notification	Yes

## frogDim1-0

### Dimensions and weight


Dimensions (L x B x H): 53 x 48 x 21 mm  
Weight: 30 g

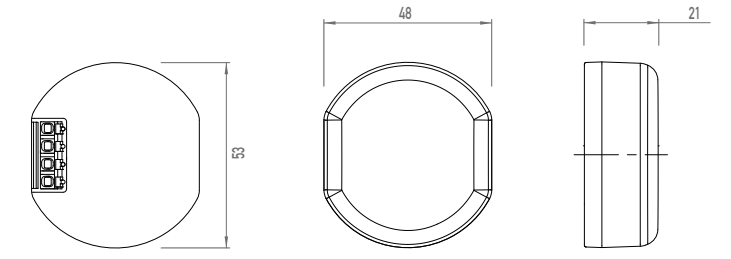

### Connection example:

**Socket depth** min. 53 mm for installation behind switch insert  
rec. 63 mm for installation behind switch insert

Individual installation is necessary for shallow depths.



### Electricity supply

Mains voltage	AC 110–240 V ~
Mains frequency	50 / 60 Hz
Stand-by consumption	< 220 mW

### Network

WLAN	No
Bluetooth	Bluetooth 4.2 Low Energy
Frequency range	2400–2483.5 MHz maximum 0.5dBm
Typical radio open field range	30 metres

### Operation and storage

Ambient temperature	25 ° to +55 °C
Storage temperature	-25 ° to +70 °C
Air humidity (during operation)	(Non-condensing)

### Power connection

Contact type	ε, MOFSET
Connection variants	for bell, lamps
Connection type	Spring-type terminal (single wire)
Wire cross section	1–1.5 mm <sup>2</sup> (rigid conductor recommended)
Stripping length	8 mm

### Packaging

Packaging size	1 unit
EAN	4260578530200
Packaging dimensions (L x W x H) 1 unit	75 x 30 x 75 mm
Weight including packaging 1 unit	50 g

### Note

A relay module (e.g. frogRelay2-2, frogRelay2-2-PF) must be used to control motor loads (e.g. roller shutter motor)

frogblue\_Data\_EN\_1-21\_D1-0-300.01 01.21

Subject to change.  
Electrical equipment may be installed and fitted only by qualified electricians.

Further information  
[www.frogblue.com](http://www.frogblue.com).

