

## frogIn3-AC

Multifunktionell ingångsenhet med 3st kanaler för kontroll av knappar och brytare (110 - 240V~). Med komfort- och tidsfunktioner.



### Technical Data

#### Category

Article designation	frogIn3-AC
Article number	I3-AC.01
Assembly type	Recess-mounted (in device socket according to DIN 49073)


#### Functions and power

Inputs	3 (AC 110–240 V ~)
Outputs	–
Outputs can be dimmed	–
Minimum Load	–
Maximum Power per output	–
Suitable loads	–
Unsuitable loads	–
Output modes	–
Protection category	Conforms to IP20 VDE Test Mark Certifications
Integrated logic module	Yes
Integrated configuration backup	Yes
Comfort and timer functions	Yes
Power measurement	–
Short circuit detection and notification	–

## frogIn3-AC

### Dimensions and weight


Dimensions (L x B x H): 53 x 48 x 21 mm  
Weight: 25 g

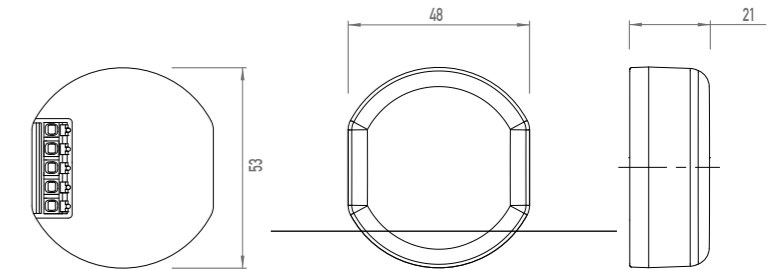

### Connection example:

**Socket depth** min. 53 mm for installation behind switch insert  
rec. 63 mm for installation behind switch insert

Individual installation is necessary for shallow depths.

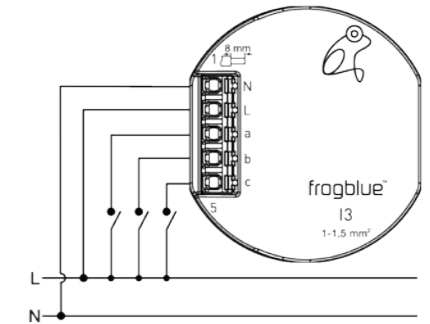

### Electricity supply

Mains voltage	AC 110–240 V ~
Mains frequency	50 / 60 Hz
Stand-by consumption	< 130 mW

### Network

WLAN	No
Bluetooth	Bluetooth 4.2 Low Energy
Frequency range	2400–2483.5 MHz maximum 4.3dBm
Typical radio open field range	30 metres

### Operation and storage

Ambient temperature	-25°C to +65°C
Storage temperature	-25°C to +70°C
Air humidity (during operation)	(Non-condensing)

### Power connection

Type of contact	–
Connection variants	for buttons, switches
Connection type	Spring-type terminal (single wire)
Wire cross section	1–1.5 mm <sup>2</sup> (rigid conductor recommended)
Stripping length	8 mm

### Packaging

Packaging size	1 unit
EAN 1 unit	4260578530224
Packaging dimensions (L x W x H) 1 unit	75 x 30 x 75 mm
Weight including packaging 1 unit	42 g

frogblue\_Data\_EN\_1-21\_I3-AC.01 01.21

Subject to change.  
Electrical equipment may be installed and fitted only by qualified electricians.

Further information  
[www.frogblue.com](http://www.frogblue.com).

