
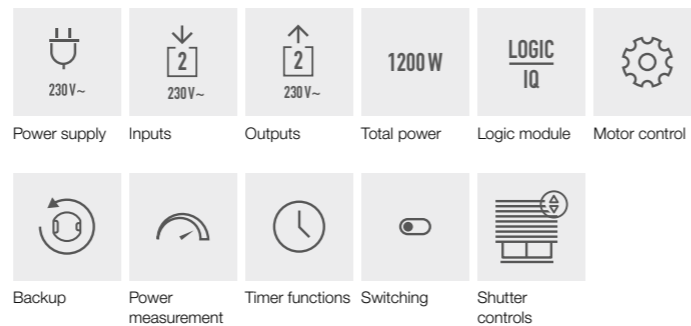


frogRelay2-2

Multifunktionell reläkontakt med två kanaler och två utgångar för jalusi-/persiennstyrning eller för koppling av annan last. Med två ingångar för kontroll av knappar och kontakter (110 - 240V~). Med komfort- och tidsfunktioner, effektmätning och överlastskydd. (Total 1200W vid 230V~).

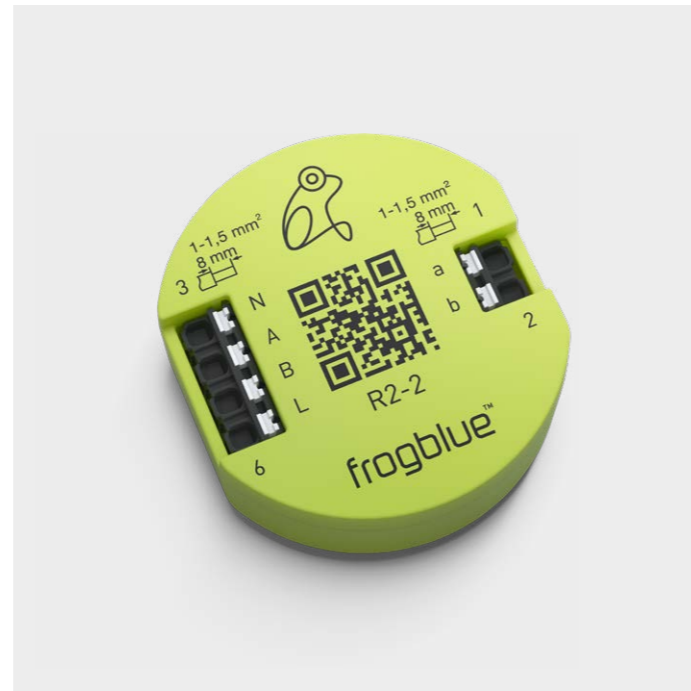

Technical Data

Category

Article designation	frogRelay2-2
Article number	R2-2-1200.01
Assembly type	Recess-mounted (in device socket according to DIN 49073)


Functions and power

Inputs	2 (AC 110–240 V ~)
Outputs	2 (AC 110–240 V ~)
Outputs can be dimmed	No
Minimum load	-
Maximum Total output	Light bulbs/LEDs, HV halogen bulbs: 1200 W (220-240 V ~), 600 W (110-219 V~), capacitive load: maximum 6A (110-240 V~), electronic transformer: 600 VA (220-240 V~), 300VA (110-219 V~)
Protection category	Conforms to IP20
Motor control	Yes
Integrated logic module	Yes
Integrated configuration backup	Yes
Comfort and timer functions	Yes
Power measurement	Yes
Short circuit detection and notification	No

frogRelay2-2

Dimensions and weight


Dimensions (L x B x H): 53 x 48 x 21 mm
Weight: 50 g

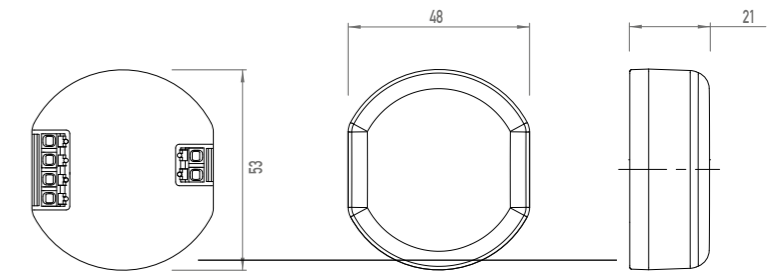

Connection example:

Socket depth min. 53 mm for installation behind switch insert
rec. 63 mm for installation behind switch insert

Individual installation is necessary for shallow depths.

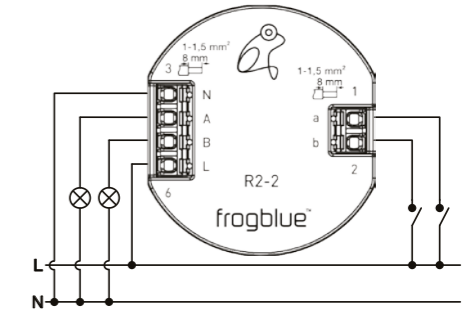

Electricity supply

Mains voltage	AC 110–240 V ~
Mains frequency	50 / 60 Hz
Stand-by consumption	< 190 mW

Network

WLAN	No
Bluetooth	Bluetooth 4.2 Low Energy
Frequency range	2400–2483.5 MHz maximum 2.9 dBm
Typical radio open field range	30 metres

Operation and storage

Ambient temperature	-25 ° to +50 °C
Storage temperature	-25 ° to +70 °C
Air humidity (during operation)	(Non-condensing)

Power connection

Contact type	μ normally open contact
Connection variants	roller blind/roller shutter motor, lamps, buttons, switches etc.
Connection type	Spring plug-in terminal
Wire cross section	1–1.5 mm ² (rigid conductor recommended)
Stripping length	8 mm

Packaging

Packaging size	1 unit
EAN 1 unit	4260578530248
Packaging dimensions (L x W x H) 1 unit	75 x 30 x 75 mm
Weight including packaging 1 unit	70g

frogblue_Data_EN_1-21_R2-2-1200.01 01.21

Subject to change.
Electrical equipment may be installed and fitted only by qualified electricians.

Further information
www.frogblue.com.

