


Product name	96F G657A1-200 MLT cable Green LSZH Cca OD 7.8mm EIA/TIA 4km/d
Product code	4701754
GTIN	7332811343995
ETIM-Class	EC000034

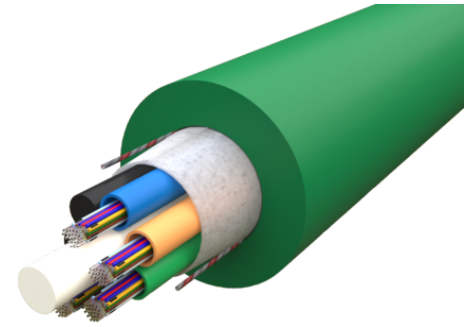

PRODUCT SPECIFICATIONS

96F SM G657A1 200µm multi purpose cable used for both indoor installation and outdoor installation in ducts applications by pulling. Cable parameters such as cable flexibility, diameter and higher safety levels for fire and dangerous substances makes it optimized for safe and effective indoor installation as well as for outdoor installation in ducts. The cable is based on a multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

The expected service life in normal use exceeds 30 years.

Measurements

Length	1000 mm
Height	7,8 mm
Width	7,8 mm
Weight	75 g

Physical Characteristics

Fibre Count	96
Cable Construction	Multi Loose Tube (MLT)
Fibre Type	ITU-T G.657 A1 200um
Fibres per Tube	24
Fibre Colour Sequence	EIA/TIA-598A
Tube Size	1,5 mm

Central Strength Member	FRP
No of Tubes	4 + 2 fillers
Tube Colour Sequence	EIA/TIA-598A
Outer Sheath Material	LSZH (Low Smoke Zero Halogen)
Colour of Cable Sheath	Green
Nominal Sheath Thickness	1,3 mm
No of Ripcords Below Outer Sheath	1
Cable Diameter	7,8 mm
Cable Diameter Tolerance	+/- 0.4 mm
Nominal Cable Weight	75 kg/km

Mechanical & Environmental Characteristics

Halogen Free	Yes
UV Proof	Yes
Metal free	Yes
CPR	Yes
CPR Classification	Cca-s1b, d1, a1
Tensile Strength (N) IEC-60794-1-21-E1	1 000 N
Crush Resistance - IEC- 60794-1-21-E3	1 000 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	330 mm
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	165 mm
Water Penetration Test IEC-60794-1-22-F5	1m head, 3m samples, 24 hrs.
Drip Test IEC-60794-1-21-E14	30 cm, 70°C, 24 hr
Temperature Performance Installation IEC-60794-1-22-F1	-5°C till +50°C
Temperature Performance Operation IEC-60794-1-22-F1	-30°C till +60°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C till +70°C