


Product name	8F Blown fiber EPSU SM G657A1 Yellow HDPE 1,4mm 4km/pan, S12
Product code	5042436
Product type	EPSU 8XG657A1 YE
GTIN	7332811193859
ETIM-Class	EC000034

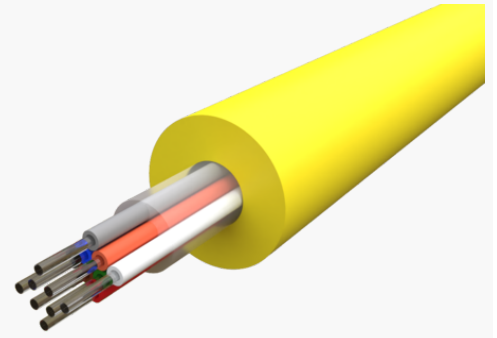

## PRODUCT SPECIFICATIONS

8F SM G657A1 EPSU air blown optical fibre is typically used in micro duct installation applications. ABF can utilize in existing and new duct systems more effectively by accommodating more fibres in given subduct network. The fiber units is suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction is optimized for best installation performance. The expected service life in normal use exceeds 30 years.

## Measurements

Length	1 000 mm
Height	1,4 mm
Width	1,4 mm
Weight	1,6 g

## Physical Characteristics

Fibre Count	8
Cable Construction	Acrylat
Fibre Type	ITU-T G.657 A1
Fibre Colour Sequence	S12
Outer Sheath Material	HDPE (High Density Polyethylene)
Colour of Cable Sheath	Yellow
Cable Diameter	1,4 mm
Cable Diameter Tolerance	+/- 0.2 mm

Nominal Cable Weight	1,6 kg/km
----------------------	-----------

## Mechanical & Environmental Characteristics

Halogen Free	Yes
Metal free	Yes
Tensile Strength (N) IEC-60794-1-21-E1	15 N
Crush Resistance - IEC- 60794-1-21-E3	100 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	60 mm
Temperature Performance Installation IEC-60794-1-22-F1	-15°C till +50°C*
Temperature Performance Operation IEC-60794-1-22-F1	-40°C till +60°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C till +60°C