


Product name	2F G657A2 TB dual jacket cable Black/White OD 5/2.4mm EIA/TIA 1km/d
Product code	4702351
GTIN	7332811382505
ETIM-Class	EC000034

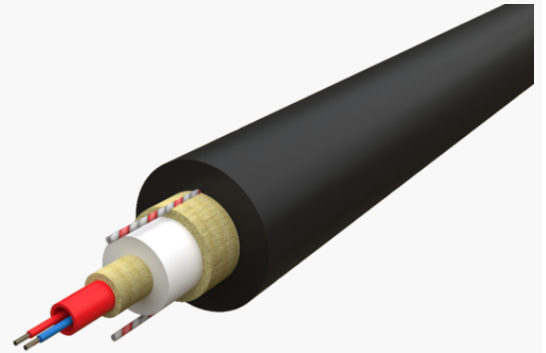

## PRODUCT SPECIFICATIONS

The cable has a black LSZH and UV-resistant outer jacket and a white FRNC and CPR Cca-s1a d0 a1 approved inner jacket. When entering the premises from the outside, the outer jacket is removed and the inner flame retardant jacket is exposed for further indoor installation.

## Measurements

Length	1 000 mm
Height	5 mm
Width	5 mm
Weight	20 g

## Physical Characteristics

Fibre Count	2
Cable Construction	Tight Buffered (TB)
Fibre Type	ITU-T G.657 A2
Fibres per Tube	2
Fibre Colour Sequence	EIA/TIA-598A
Tube Size	0,9 mm
No of Tubes	1
Tube Colour Sequence	EIA/TIA-598A
Outer Sheath Material	HDPE + FRNC
Double Sheath	Yes

Colour of Cable Sheath	Black & White
No of Ripcords Below Outer Sheath	2
Cable Diameter	5 mm
Cable Diameter Tolerance	± 0.2
Nominal Cable Weight	20 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
UV Proof	Yes
Metal free	Yes
CPR	Yes
CPR Classification	Cca-s1a, d0, a1
Tensile Strength (N) IEC-60794-1-21-E1	600 N
Crush Resistance - IEC- 60794-1-21-E3	1 000 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	20 x OD
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	15 x OD
Temperature Performance Installation IEC-60794-1-22-F1	-5°C to +50°C
Temperature Performance Operation IEC-60794-1-22-F1	-40°C to +70°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C to +70°C
Cable Length In Package	1 000 m