


Number	Modification			Date	Name

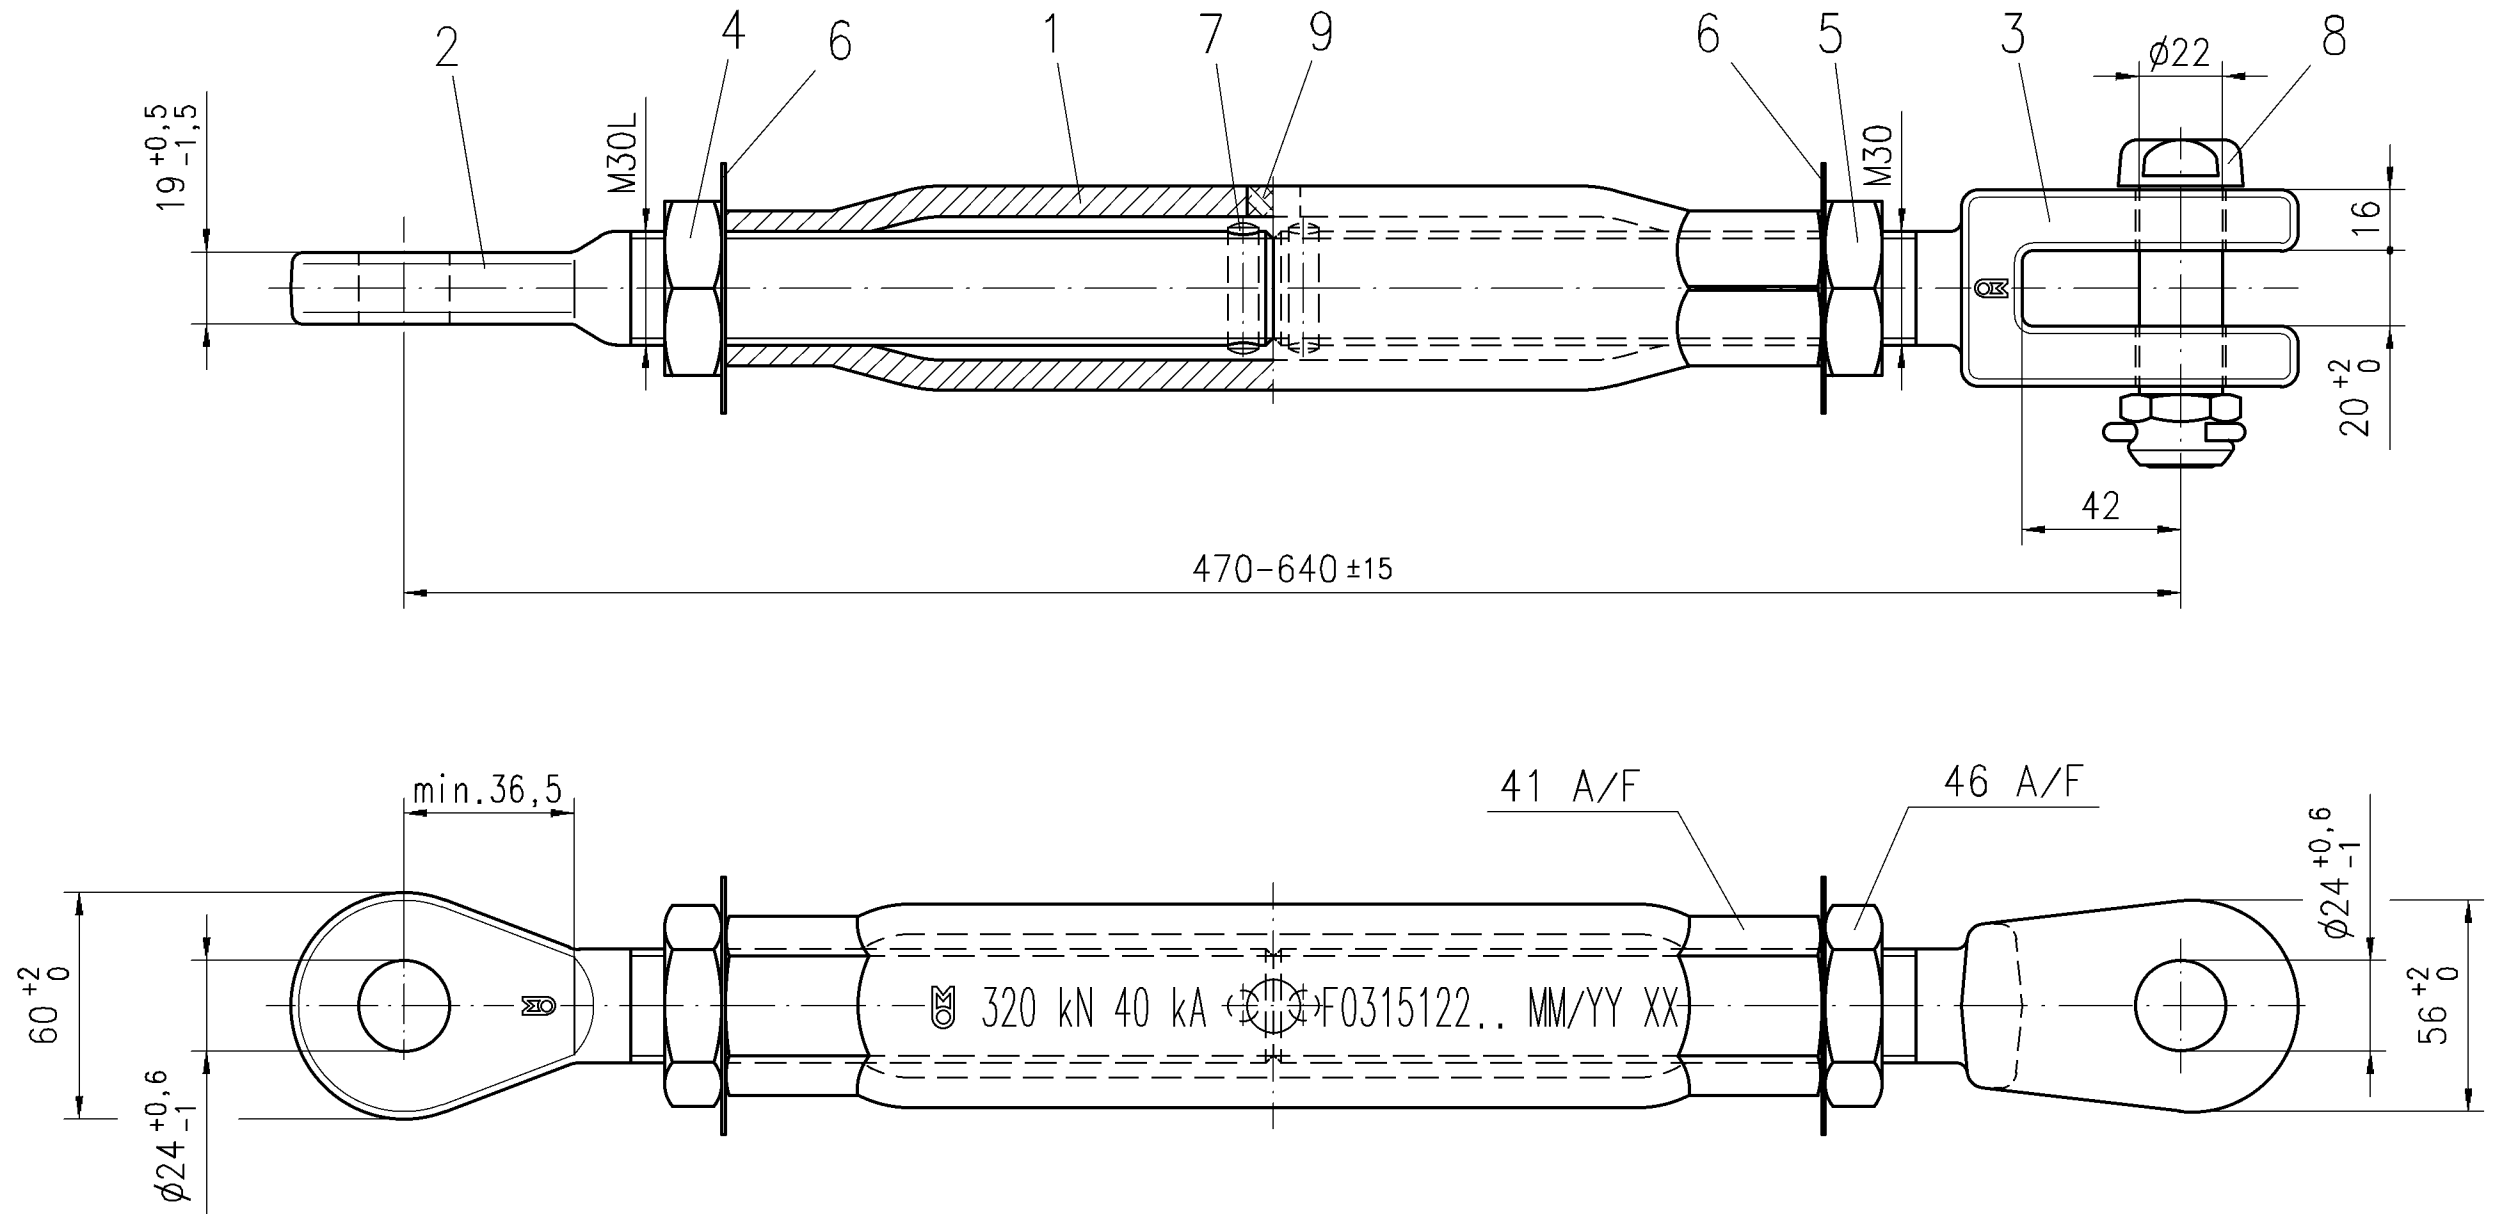

Type	Art. No.	Drwg. No.
1	4268.46/1	F0315122
2	4268.46/1_VZ3	F0315122/2

Type 1:
The average thickness of zinc coating: min. 85 μ m (only for turnbuckle nut, Item 1)
The average thickness of zinc coating for fasteners: min. 55 μ m

Type 2:
The average thickness of zinc coating: min. 130 μ m (only for turnbuckle nut, Item 1)
The average thickness of zinc coating for fasteners: min. 55 μ m

8	1	Plug Ø14		D0315007	ZV 100.100	Al		
8	1	Bolt 22x54		S0001136	1046.32/0	8.8	hot dip galv.	
7	2	Parallel pin Ø8x32	DIN 6325		1050.42	Steel	hardened	
6	2	Washer with tap for M30		A4-12122	4-12122	A2	stainless	
5	1	Hexagon nut flat M30	DIN 439		1052.34/2	8	hot dip galv.	
4	1	Hexagon nut flat M30L	DIN 439		1052.44/2	8	hot dip galv.	
3	1	Clevis bolt M30x240		D0315169	ZG 010.089	Steel	hot dip galv.	
2	1	Eye bolt M30Lx230		D0315168	Z0 001.188/1L	Steel	hot dip galv.	
1	1	Turnbuckle nut M30x290		D0315136	ZS 095.087/2	Steel	hot dip galv.	
l	Qty	Description	Standard	Drg. no.	Art. no.	Material	Surface	Mass [kg]
2010	Date	Name				Replace for		Sim. to drg.-no.
Drawn	23.11.	Grimm				Replaced by		F0315061
Checked	23.11.	Zechner				Art. No. 4268.46/1		
		Title Turnbuckle M30 eye-clevis, 470-640 mm			Drg. No. F0315122		Rev.	Mod.
Scale 1:2							a	A3
					No. of pages		Page	